



BRC-562ADII



BRC-562ADI


BRC-562ADII

品名：平台高速电脑绷缝机
High Speed Computerized Flat-bed Interlock Machine

特性：高效，稳定，自动化
Stable, high efficiency and automatic



自动剪线，省人省线
Auto thread trimming

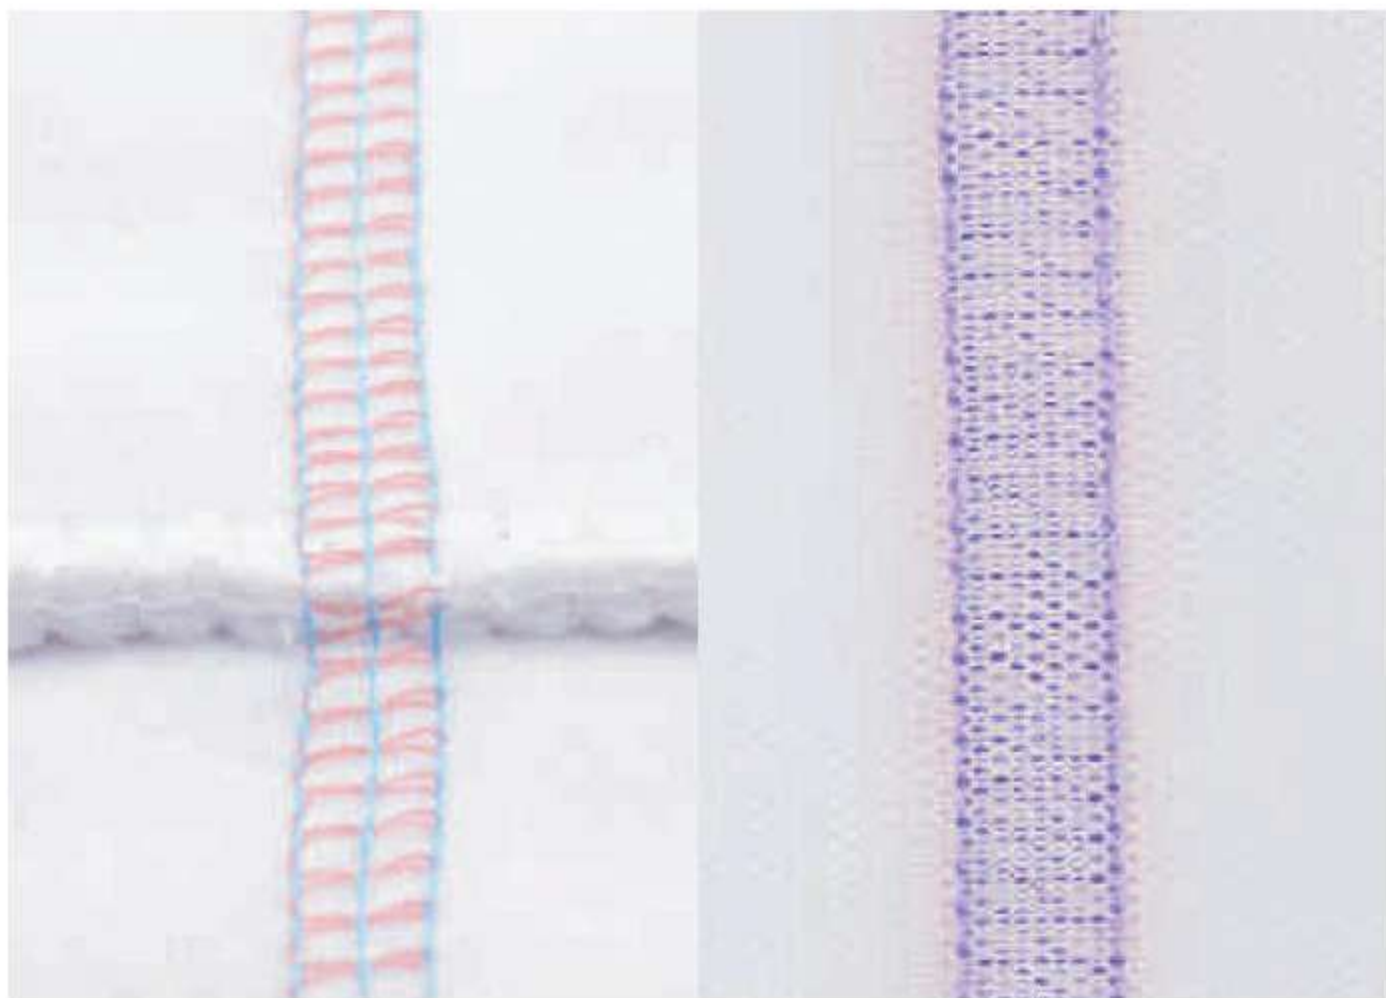

缝薄过厚，线迹美观
Suitable for light to heavy material with beautiful stitches

技术参数 Specification

											
BRC-562ADII-01GB/UT	基本缝 Plain seaming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	6.2	5000	670×445×595	54/64
BRC-562ADII-02BB/UT	滚领缝 Tape binding	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	6.2	5000	670×445×595	54/64
BRC-562ADII-03DB/UT	盖缝 Covering stitch	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	6.2	5000	670×445×595	54/64
BRC-562ADII-08AC/UT	下摆折边缝 Bottom hemming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	6.2	5000	670×445×595	54/64
BRC-562ADI-01GB	基本缝 Plain seaming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	6.2	5500	670×445×595	48/58
BRC-562ADI-02BB	滚领缝 Tape binding	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	6.2	5500	670×445×595	48/58
BRC-562ADI-03DB	盖缝 Covering stitch	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	6.2	5500	670×445×595	48/58
BRC-562ADI-05CB	缝松紧带（右刀） Elastic lace attaching(right-side cutter)	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	5	4000	670×445×595	48/58
BRC-562ADI-07CB	缝松紧带 Elastic lace attaching	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	5	4000	670×445×595	48/58
BRC-562ADI-08AC	下摆折边缝 Bottom hemming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	6.2	5500	670×445×595	48/58
BRC-562ADI-23GB	基本缝（大针距） Plain seaming(Large stitch length)	UY128GAS 11-14#	3	5	6	5.6/6.4	0.65-1	6.2	4000	670×445×595	48/58
BRC-562ADI-23BB	滚领缝（大针距） Tape binding(Large stitch length)	UY128GAS 11-14#	3	5	6	5.6/6.4	0.65-1	6.2	4000	670×445×595	48/58
BRC-562ADI-23GBL	基本缝（超大针距） Plain seaming(Extra large stitch length)	UY128GAS 11-14#	2	4	7-7.5	5.6/6.4	1	6.2	4000	670×445×595	48/58
BRC-562ADI-23BBL	滚领缝（超大针距） Tape binding(Extra large stitch length)	UY128GAS 11-14#	2	4	7-7.5	5.6/6.4	1	6.2	4000	670×445×595	48/58

注（Note）：
UT代表电脑；DI代表直驱。
UT stands for computerized, DI stands for direct drive.