



BRC-862E



BRC-562ADI


BRC-562E

品名：平台高速电脑绷缝机
High Speed Flat-bed Interlock Machine

特性：稳定，高效，自动化
Stable, automatic and high efficiency



自动剪线，省人省线
Auto thread trimming

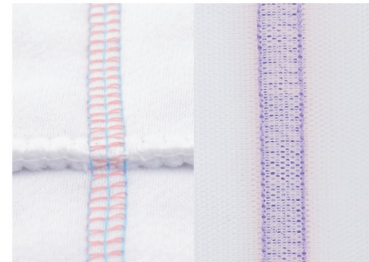

缝薄过厚，线迹美观
Suitable for light to heavy material with beautiful stitches

技术参数 Specification

Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon
												NW/GW (kg)
BRC-562E-01GB/UT(UT2)	基本缝 Plain seaming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	6.2	5000	670×445×595	54/64	
BRC-562E-02BB/UT(UT2)	滚领缝 Tape binding	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	6.2	5000	670×445×595	54/64	
BRC-562E-03DB/UT(UT2)	盖缝 Covering stitch	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	6.2	5000	670×445×595	54/64	
BRC-562E-08AC/UT(UT2)	下摆折边缝 Bottom hemming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	6.2	5000	670×445×595	54/64	
BRC-562ADI-01GB	基本缝 Plain seaming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	6.2	5500	670×445×595	48/58	
BRC-562ADI-02BB	滚领缝 Tape binding	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	6.2	5500	670×445×595	48/58	
BRC-562ADI-03DB	盖缝 Covering stitch	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	6.2	5500	670×445×595	48/58	
BRC-562ADI-05CB	缝松紧带 (右刀) Elastic lace attaching(right-side cutter)	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	5	4000	670×445×595	48/58	
BRC-562ADI-07CB	缝松紧带 Elastic lace attaching	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	5	4000	670×445×595	48/58	
BRC-562ADI-08AC	下摆折边缝 Bottom hemming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	6.2	5500	670×445×595	48/58	
BRC-562ADI-23GB	基本缝 (大针距) Plain seaming(Large stitch length)	UY128GAS 11-14#	3	5	6	5.6/6.4	0.65-1	6.2	4000	670×445×595	48/58	
BRC-562ADI-23BB	滚领缝 (大针距) Tape binding(Large stitch length)	UY128GAS 11-14#	3	5	6	5.6/6.4	0.65-1	6.2	4000	670×445×595	48/58	
BRC-562ADI-23GBL	基本缝 (超大针距) Plain seaming(Extra large stitch length)	UY128GAS 11-14#	2	4	7-7.5	5.6/6.4	1	6.2	4000	670×445×595	48/58	
BRC-562ADI-23BBL	滚领缝 (超大针距) Tape binding(Extra large stitch length)	UY128GAS 11-14#	2	4	7-7.5	5.6/6.4	1	6.2	4000	670×445×595	48/58	

注 (Note) :

UT代表电脑; UT2代表电脑, 不含上剪线刀; DI代表直驱。

UT: computerized type (auto presser foot lifter, auto trimming) ; Ut2: computerized type without upper cutter; DI: direct drive type