


绷缝机系列
Interlock Machine



BRC-664BDII

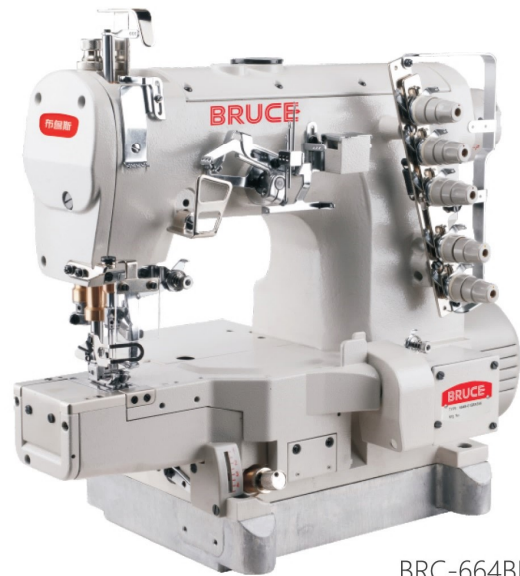

BRC-664BDI

BRC-664BDII


品名：小方头式高速电脑绷缝机

High Speed Computerized Cylinder-bed Interlock Machine

特性：稳定，高效，自动化
Stable, automatic and high efficiency



自动剪线，省人省线
Auto thread trimming

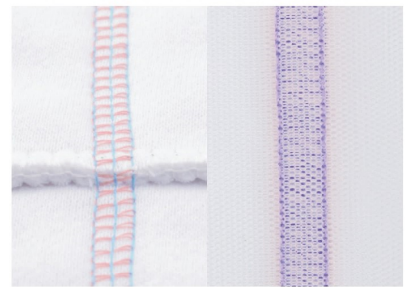

缝薄过厚，线迹美观
Suitable for light to heavy material with beautiful stitches

技术参数 Specification

														
										(mm)	(S.p.m)	(mm)	(mm)	(kg)
BRC-664BDII-01GB/UT(UT2)	基本缝 Plain seaming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	6.2	5000	680×420×630	52/62			
BRC-664BDII-03GB/UT(UT2)	盖缝 Covering stitch	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	6.2	5000	680×420×630	52/62			
BRC-664BDII-08AC/UT(UT2)	下摆折边缝 Bottom hemming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	6.2	5000	680×420×630	52/62			
BRC-664BDII-35AC/UT(UT2)	下摆折边缝(左刀) Bottom hemming(left-side cutter)	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	6.2	5000	680×420×750	53/65			
BRC-664BDI-01GB	基本缝 Plain seaming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	6.2	5000	630×390×630	46/56			
BRC-664BDI-02BB	滚领缝 Tape binding	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	6.2	5000	630×390×630	46/56			
BRC-664BDI-03GB	盖缝 Covering stitch	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	6.2	5000	630×390×630	46/56			
BRC-664BDI-08AC	下摆折边缝 Bottom hemming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	6.2	5000	630×390×630	46/56			
BRC-664BDI-35AC	下摆折边缝(左刀) Bottom hemming(left-side cutter)	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	6.2	5000	630×390×750	47/59			

注 (Note) :

UT代表电脑; UT2代表电脑, 不含上剪线刀; DI代表直驱。

UT: computerized type; UT2: computerized type without upper cutter; DI: direct drive type