




BRC-
 264BDII

品名：细嘴高速电脑绷缝机
 High Speed Computerized Small Cylinder-bed
 Interlock Machine
 特性：细嘴，稳定，高效
 Small cylinder bed, stable and high efficiency

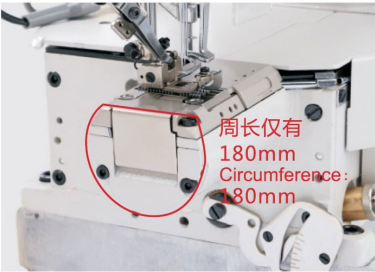

超细嘴180mm，缝制范围广
 180mm small cylinder bed, wide range of application



自动剪线，省人省线
 Auto thread trimming

技术参数 Specification

													
BRC-264BDII-01CB/UT	基本缝 Plain seaming	UY128GAS 11-14#	3	5	1.5-3.6	5.6/6.4	0.8-1.4	6.2	4500	680×420×630	50/60		
BRC-264BDII-03FB/UT	盖缝（压扁） Covering stitch(wafered)	UY128GAS 11-14#	3	5	1.5-3.6	5.6/6.4	0.8-1.4	6.2	4500	680×420×630	50/60		
BRC-264BDII-03GB/UT	盖缝（单边倒） Covering stitch(side)	UY128GAS 11-14#	3	5	1.5-3.6	5.6/6.4	0.8-1.4	6.2	4500	680×420×630	50/60		
BRC-264BDII-08AC/UT	下摆折边缝（窄幅） Bottom hemming(narrow)	UY128GAS 11-14#	3	5	1.5-3.6	5.6/6.4	0.8-1.4	6.2	4500	680×420×630	50/60		
BRC-264BDII-08BC/UT	下摆折边缝（宽幅） Bottom hemming(wide)	UY128GAS 11-14#	3	5	1.5-3.6	5.6/6.4	0.8-1.4	6.2	4500	680×420×630	50/60		
BRC-264BDI-01CB	基本缝 Plain seaming	UY128GAS 11-14#	3	5	1.5-3.6	5.6/6.4	0.8-1.4	6.2	4500	630×390×630	42/54		
BRC-264BDI-03FB	盖缝（压扁） Covering stitch(wafered)	UY128GAS 11-14#	3	5	1.5-3.6	5.6/6.4	0.8-1.4	6.2	4500	630×390×630	42/54		
BRC-264BDI-03GB	盖缝（单边倒） Covering stitch(side)	UY128GAS 11-14#	3	5	1.5-3.6	5.6/6.4	0.8-1.4	6.2	4500	630×390×630	42/54		
BRC-264BDI-08AC	下摆折边缝（窄幅） Bottom hemming(narrow)	UY128GAS 11-14#	3	5	1.5-3.6	5.6/6.4	0.8-1.4	6.2	4500	630×390×630	42/54		
BRC-264BDI-08BC	下摆折边缝（宽幅） Bottom hemming(wide)	UY128GAS 11-14#	3	5	1.5-3.6	5.6/6.4	0.8-1.4	6.2	4500	630×390×630	42/54		

注（Note）：
 UT代表电脑；DI代表直驱。
 UT: computerized type（auto presser foot lifter, auto trimming），DI: direct drive type